



LCR 60 & 30 Series Composer Collection

Reimagining the in-wall speaker has been the passion of our engineers who had created the first of its kind decades ago. The Composer LCR Series is the result of starting that process with a blank canvas. Innovative driver configurations combined with hours of critical listening and fine-tuning has resulted in this incredible offering that has raised the bar on the entire category.



LCR68



LCR66



LCR64



LCR38



LCR36

DPSD™ Tweeter

Featured in the C68 and C66, this patented tweeter has the greatest output and is able to crossover much lower to either the woofer or the midrange improving both dispersion and the frequency response.

Woofer Cone Materials

Designed from the ground up, we only use the finest materials for our woofers to ensure optimal performance in response with speed and precision.

Compression Molded Baskets

These complex baskets that support the woofer cones were computer designed and compression molded with absolute precision allowing for unique support and venting elements to assure peak performance.

EQ Adjustment

These switches on the baffle allows the adjustment of the output of either the high frequencies or both high and low frequencies to custom tailor the sound based on the proximity of the architectural elements of the room.

Tool-less Mounting System


The SpringLock™ mounting dogs are spring loaded and require only a twist with a thumbnail to have them snap easily and securely into place.

X-Wave™ Woofer Surround

This suspension element absorbs unwanted frequencies that reflect up and down the woofer cone to reduce harmonic distortion while maintaining the desired linear travel of the woofer.

Specifications

Model	LCR68	LCR66	LCR64	LCR38	LCR36
Part Number	SWML14800	SWML14600	SWML14400	SWML10800	SWML10600
Woofer Cone	Kevlar	Glass Fiber	IMG	Kevlar	Glass Fiber
Woofer Dimensions	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	3.5" (89mm)	3.5" (89mm)
Tweeter Dome	Silk DPSD	Silk DPSD	Aluminum	Silk DPSD	Silk DPSD
Tweeter Diameter	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)
Frequency Response	53 Hz - 20 kHz	55 Hz - 20 kHz	55 Hz - 20 kHz	70 Hz - 20 kHz	70 Hz - 20 kHz
Impedance	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Power Handling	25 - 175 Watts	25 - 150 Watts	25 - 150 Watts	25 - 80 Watts	25 - 80 Watts
Dimensions	7.48 x 15.20" (190 x 386mm)	7.48 x 15.20" (190 x 386mm)	7.48 x 15.20" (190 x 386mm)	5.28 x 10.31" (134 x 262mm)	5.28 x 10.31" (134 x 262mm)
Grille Dimensions	7.89 x 15.61" (200 x 396mm)	7.89 x 15.61" (200 x 396mm)	7.89 x 15.61" (200 x 396mm)	5.69 x 10.72" (144 x 272mm)	5.69 x 10.72" (144 x 272mm)
Cutout Dimensions	6.625 x 14.375" (168 x 364mm)	6.625 x 14.375" (168 x 364mm)	6.625 x 14.375" (168 x 364mm)	4.375 x 9.5" (112 x 240mm)	4.375 x 9.5" (112 x 240mm)
Mounting Depth	3.74" (95mm)	3.74" (95mm)	3.74" (95mm)	3.74" (95mm)	3.74" (95mm)

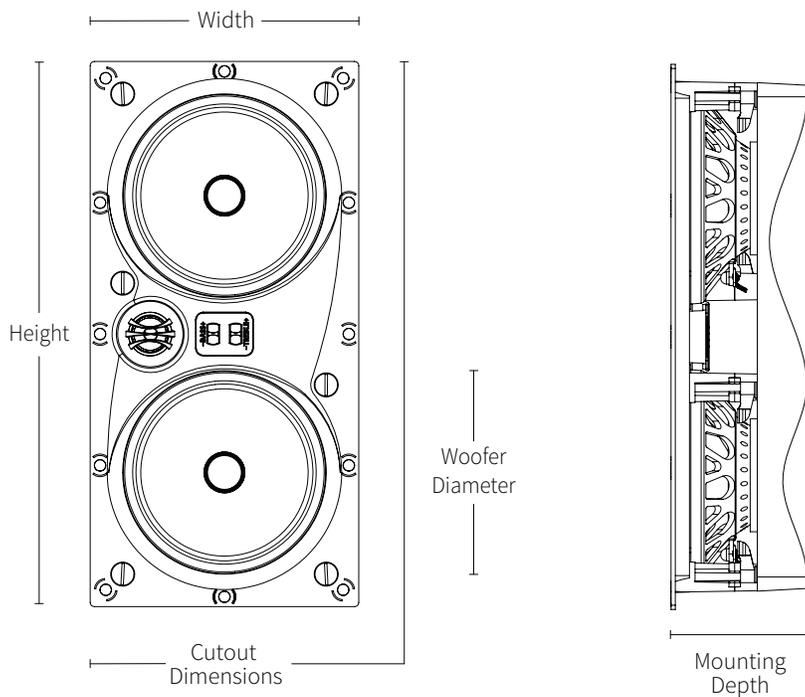

*Not to Scale